


Bellman Magnetic switch BE9023

Function

The BE9023 Bellman Magnetic switch consists of two parts; a Magnetic switch and a magnet. The Magnetic switch is open when near to the magnet and closes to form a contact when the magnet is moved away. The BE9023 is most suitable for use with the BE1123 Visit Telephone Transmitter to identify whether windows or doors, etc., are open.

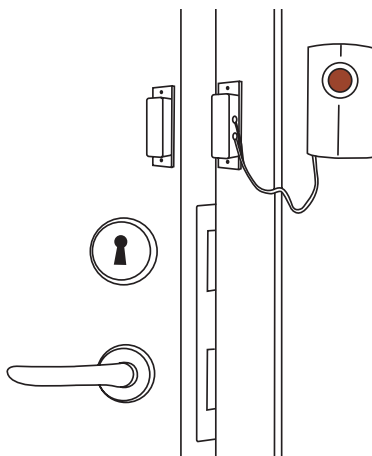

Technical information

Output signals

Connector: 3.5mm mono jack plug.

Contact breaker

Close to magnet (max 1 cm): Open
At least 2 cm from magnet: Closed

Additional information

For indoor use only

Dimensions WxHxD: 25 x 62 x 13 mm

Weight: 25 g


Colour: White

Flex length: 0.5 m

Bellman Door entering contact mat BE9024

Function

The BE9024 Bellman Entry Monitor is a Door entering contact mat for indoor use. The BE9024 is most suitable for use with the BE1123 Bellman Visit Telephone Transmitter to identify whether a person is going in or out of a door, or has got out of bed, etc.

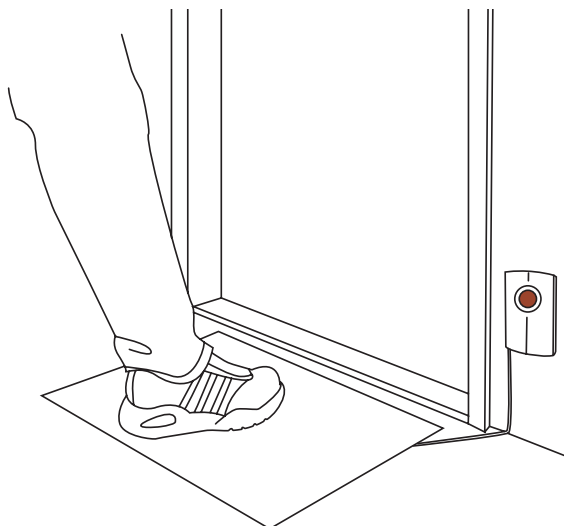

Technical information

Output signals

Connector: 3.5mm mono jack plug.

Contact breaker

Longitudinal contact breaker

Distance between contact breakers: 9 cm.

Without load: Open

With load: Closed

Load: Contact made over 5mm
with a point load of 5 kg

Additional information

For indoor use only

Dimensions WxHxD: 745 x 420 x 3 mm

Weight: 675 g

Colour: Black

Flex length: 1.5 m