

# Slant Back Whirlpools



## SB Series 100 Gallon Slant Back Stationary Whirlpool

Model SB-100-S



Product photo/image above may show some available options

**SB-100-S Slant Back Stationary Whirlpool** is recommended for treatment of extremities, hip and back area. A slant back design allows for the user to comfortably recline while soaking in the tank.

**Tank Capacity** is 100 gallons.

**Whirlpool Tank** is 76"L x 40"W x 24"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. The tank features a slant back to allow the user to recline while soaking in the tank. A 3" wide rim allows the user to also rest their arms while soaking. Tank bottom is seamless, rounded coved design to minimize bacteria build-up. Tank is also provided with an extended stainless steel skirt flush to the floor line to conceal internal drain piping.

A 2" Combination Drain and Overflow, and a Filler Spout are provided.

**Turbine Raising and Lowering Device** permits adjustment of desired height and direction of water agitation towards the area of the body to be treated. It is spring balanced and provided with a locking device.

**Turbine Assembly** is equipped with Underwriters Laboratory listed 1/2 HP pump motor protected with an ABS plastic shell, and automatic thermal overload protector, and lifetime-sealed bearings.

All parts contacting the water are stainless steel, chrome plated brass or bronze.

**Thermometer** is provided with a dual scale, adjustable calibration. Stem inserts into a retainer to prevent rattle during whirlpool agitation.

### GUIDE SPECIFICATIONS

Provide Stationary Whirlpool (specify model number and options) with a 100-gallon capacity, 76"L x 40"W x 24"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. The tank features a slant back to allow the user to recline while soaking in the tank. The 3" rim allows the user to rest their arms while soaking. Tank shall be fitted with a stainless steel skirt flush to the floor line. Bottom of tank shall be a seamless, rounded coved design to minimize bacteria build-up. Provide a 2" combination drain and overflow, and a filler spout. Provide a turbine assembly with raising and lowering device which functions as an agitator and permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP pump motor with automatic thermal overload protector, and lifetime-sealed bearings. Provide a 3" dial thermometer with a stem retainer to prevent rattle when whirlpool is in operation.



Member of  
U.S. Green  
Building  
Council



Recyclable  
Product

# Slant Back Whirlpools

## Series

-SB Slant Back Series

## Capacity

-100 Gallons

## Type

-S Stationary Whirlpool

## Suffix Options (see Whirlpool Option Section for Details)

- ALC Adjustable Low Chair  
 -ALS Adjustable Low Stool  
 -EG Enviro Glaze Color Powder Coating  
 Specify Color: \_\_\_\_\_  
 (Special Finish Consult Factory)

## MODEL NUMBER AND OPTION SELECTIONS


- GFI Ground Fault Interrupter  
 -MXT1 Thermostatic Mixing Valve (15 GPM)  
 -MXT2 Thermostatic Mixing Valve (25 GPM)  
 -MXTWH Washout Hose For MXT Valves  
 -PCS Pump Cover Strainer  
 -SDO Separate Drain and Overflow Assembly

**Turbine** rated at 115V, 60Hz; if 220V is required please specify:  50Hz  60Hz

**ELECTRIC REQUIREMENTS:**  
 Amps: 8  
 Volts: 115  
 Hertz: 60  
 GFI Receptacle





ALL DIMENSIONS ARE IN INCHES

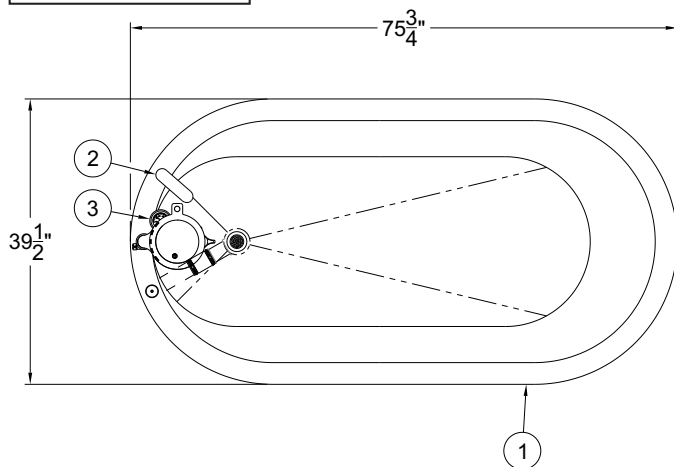

### NOTES:

1. SLANT BACK WHIRLPOOL
2. FILLER SPOUT
3. THERMOMETER
4. 1/2" HP PUMP MOTOR
5. TURBINE RAISING & LOWERING DEVICE
6. DRAIN & OVERFLOW ASSEMBLY
7. FLOOR MOUNTING BRACKET ASSEMBLY

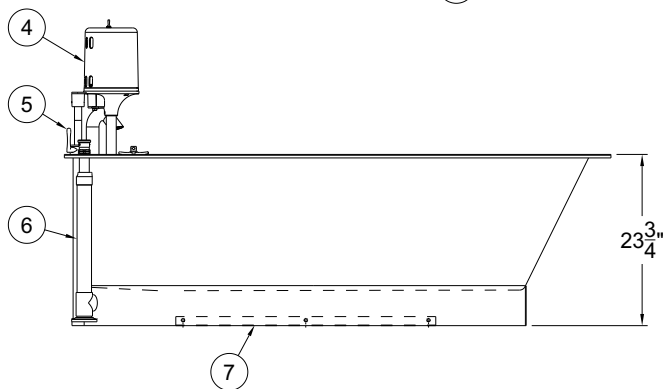

### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_