## **Sports Whirlpools**



# S Series 110 Gallon Mobile Whirlpool S-110-M



Product photo/image above may show some available options

**S-110-M Mobile Whirlpool** is recommended for treatment and prevention of sports injuries allowing coverage of the extremities, hips and back area. Professional, college and high school athletic trainers find the larger design most suitable when treating today's athletes.

Tank Capacity is 110 gallons.

**Whirlpool Tank** is 56"L x 24"W x 25"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Tank rim is reinforced with a concealed stainless steel rod. Tank is fitted with an auxiliary drain valve. Tank bottom is a seamless, rounded covered design to minimize bacteria buildup.

**Heavy Duty Swivel Casters** support all mobile models. Rear pair of casters are lockable for stabilizing whirlpool during treatment.

**Turbine Raising and Lowering Device** permits adjustment of desired height and direction of water agitation towards the area of the body to be treated. It is spring balanced and provided with a locking device.

**Turbine Assembly** functions both as agitator and emptying device. It is equipped with Underwriters Laboratory listed 1/2 HP jet pump motor protected with an ABS plastic shell, and automatic thermal overload protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze. **Thermometer** is provided with a dual scale, adjustable calibration, and a stem inserts into a retainer to prevent rattle during whirlpool agitation.

### **GUIDE SPECIFICATIONS**

Provide Mobile Whirlpool (specify model number and options) with a 110-gallon capacity, 56"L x 24"W x 25"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Tank shall have a reinforced rim and shall be fitted with an auxiliary drain valve. Bottom of tank shall be a seamless, rounded coved design to minimize bacteria build up. Whirlpool shall have heavy duty swivel casters with locking device on rear pair of casters. Provide a turbine assembly with raising and lowering device which functions both as gaitator and emptying device, permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP jet pump motor with automatic thermal overload protector, and lifetimesealed bearings. Provide a thermometer with a stem retainer to prevent rattle when whirlpool is in operation.



## **Sports Whirlpools**


#### **MODEL NUMBER AND OPTION SELECTIONS**

- O -EG Enviro Glaze Color Powder Coating -Specify Color:
- (Special Finish Consult Factory)
- **O** -GFI Ground Fault Interrupter
- O -PCS Pump Cover Strainer
- O -PHS2 Patient Handling System (Chair Type)
- **O** -RHG Rubber Hand Grips
- O -SDP Separate Drain Pump
- O -TTS2 Tank Top Seat
- **O** -WLS Water Level Sensor

Note: Separate Drain and Overflow Assembly (-SDO) is not available with Model Model S-110-M.

Turbine Assembly Electrical on standard turbine supplied is 115 V 60 Hz if 220 V is required please specify:

O 50 Hz O 60 Hz

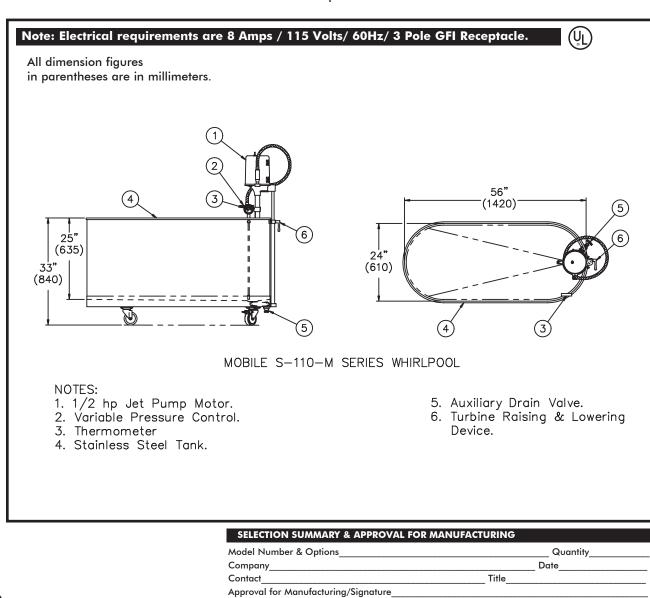

**Series** 

Type

Capacity

**O** -S Sports Series

O -M Mobile Whirlpool

O -ARS Arm Rest Support

Suffix Options (See Whirlpool Option Section for Details)

O -AHC1 Adjustable High Chair with Casters

O -CTS2 Combination Table with Side Seats

O -AHC2 Adjustable High Chair with Rubber Tips

**O** -ADH Auxiliary Drain Hose Assembly

**O** -AS2 Adjustable Suspension Seat

O -110 Gallons

S-110-M