




*Drawing is NOT to scale*

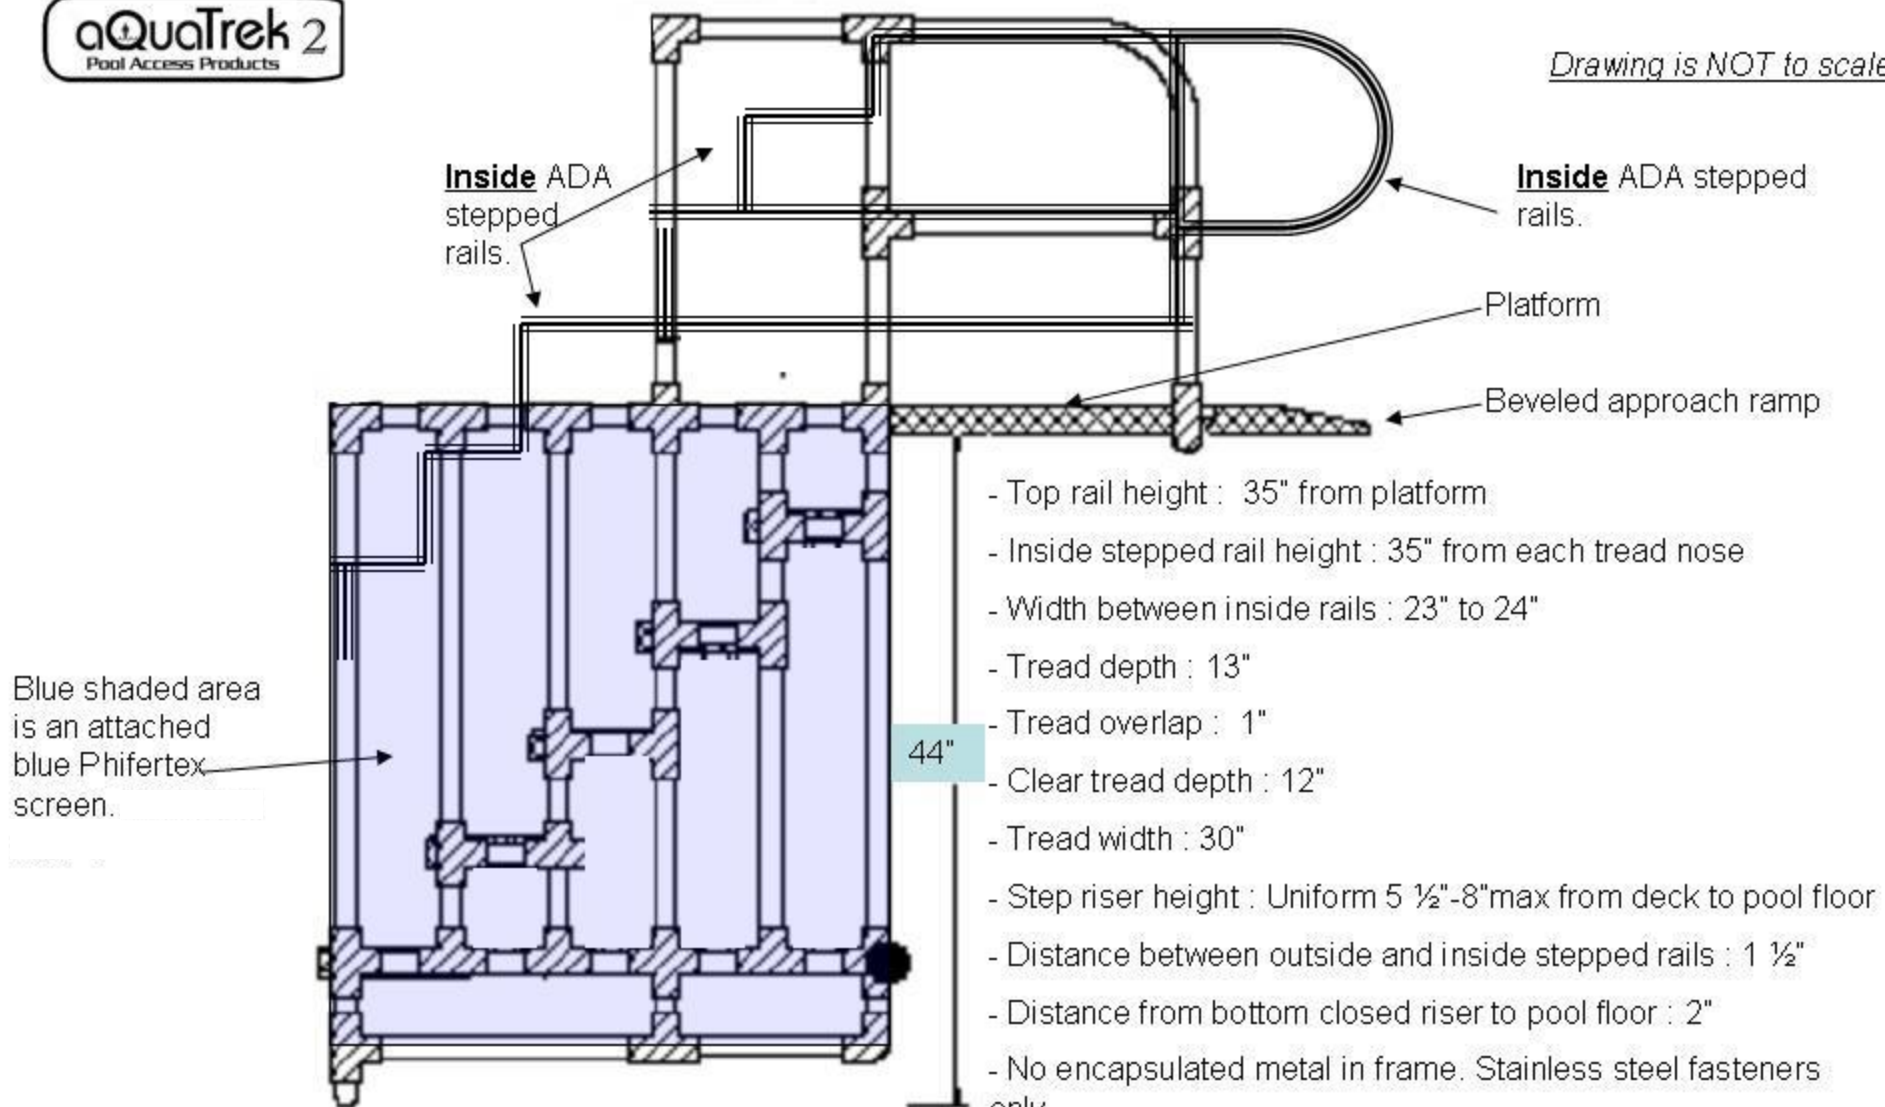

Blue shaded area is an attached blue Phifertex screen.

- Top rail height : 35" from platform
- Inside stepped rail height : 35" from each tread nose
- Width between inside rails : 23" to 24"
- Tread depth : 13"
- Tread overlap : 1"
- Clear tread depth : 12"
- Tread width : 30"
- Step riser height : Uniform 5 ½"-8"max from deck to pool floor
- Distance between outside and inside stepped rails : 1 ½"
- Distance from bottom closed riser to pool floor : 2"
- No encapsulated metal in frame. Stainless steel fasteners only.
- 2" stainless steel anchor bolts are sunk in flush to deck with Fiber deck bolts to mount the approach ramp to deck.
- Total outside width : 34"
- Total length in pool area : 5' 6" with 1 ½" - 2" from pool wall.

Constructed of Furniture grade PVC with UV rating and hardeners for durability. Some structure areas have double-walled PVC pipe for added support. 600 lbs weight capacity. No metal in the system, we use High grade stainless steel fasteners