24V SOLAR CHARGER FOR REVOLUTION, SCOUT, TITAN, SPA ULTRA & SPA ELITE LIFTS

SPECIFICATIONS:

OPERATING VOLTAGE (MAX): 35VDC OPERATING CURRENT (MAX): 225mA


HEIGHT: 36" [2032mm] WIDTH: 14" [355.6mm] DEPTH: 14" [355.6mm] WEIGHT: 10lbs [4.5kg]


FRAME MATERIAL: TYPE 304 S.S. SOLAR PANELS: TWO (2) 12V, 4W

THIN-FILM (CIGS).

CHARGE CONTROLLER:

PROTECTION RATING: IP68
[CONTROLLER: 1.5m 72 HOURS]
SHORT-CIRCUIT PROTECTION
REVERSE POLARITY DETECTION
OVERCHARGE DETECTION
(PREVENTS BATTERY DAMAGE)

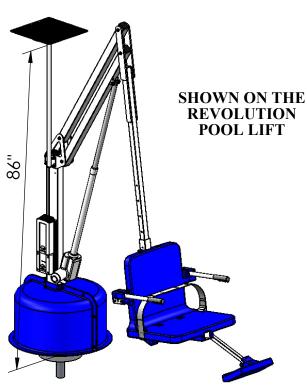



*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE *ALL DIMENSIONS ARE IN INCHES
 PRODUCT:
 F-045SCH

 DWG #:
 F-045SCH-1

 SCALE:
 1:24
 DATE: 1/11/2017

 DRAWN BY:
 KR
 REVISION:
 C

PANEL ARRAY **CHARGE CONTROLLER** (UNDERNEATH) **STAINLESS STEEL FRAME** MOUNTING **PLATE POWER PLUG CHARGER CABLE FUSE BOX**

24V SOLAR

	~~	<	®
Aqua	Creek	Produc	ts