Tel: (800) 467-6222 Fax: (724) 444-6411

Fiber Optic Waterfall

Instructions

Waterfall

The fiber optic 200 tails fall in a complete square. It allows one to sit or stand inside the softly changing colors and suspended from a Ceiling Bracket (sold separately). Fiber optic light source is included.




The Fiber Optic Waterfall comes fully assembled.

Drop Ceiling Installation:

The Fiber Optic Waterfall should be installed into a drop ceiling using a Fiber Optic Waterfall Ceiling Bracket (9FOWLB), sold separately, for best results.

- 1. Remove ceiling tile where you wish to place Fiber Optic Waterfall.
- 2. Place the Fiber Optic Waterfall Ceiling Bracket with two eye bolts facing upwards on a firm surface.
- 3. Attach chains or cables (not included) to the two eye bolts at the sides of the Fiber Optic Waterfall Ceiling Bracket for mounting to a steel or wooden beam in the ceiling.
- 4. Secure chains or cables to steel or wooden beam in ceiling.
- 5. Insert Fiber Optic Waterfall Ceiling Bracket into ceiling guides with four eye bolts facing downward (see diagram below).
- 6. Attach the Fiber Optic Waterfall chains to the four eye bolts on the Fiber Optic Waterfall Ceiling Bracket using quick links.

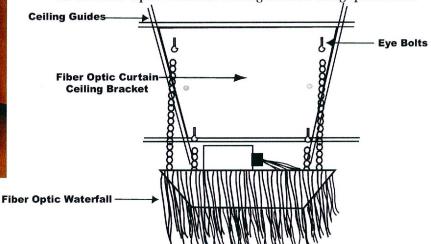

Fiber Optic Tails can be handled as they are covered with a plastic sheath. The tail will emit light the full length but will be brighter at the ends. You can achieve a more sparkling effect by bending the optic strands at different areas. This will break inner strands allowing light to show in these areas. The light source has a 12 month warranty. The light bulbs are not under warranty and can be purchased by TFH.

MAINTENANCE: The Fiber Optic Strands should be cleaned regularly using a solution of water and hydrogen peroxide wiped down the entire length of the strands. No chlorine bleach can be use to clean the strands.

TFH WILL NOT ACCEPT ANY LIABILITY IF THE UNIT IS NOT PROPERLY INSTALLED.
ALL TFH PRODUCTS SHOULD BE USED WITH ADULT SUPERVISION.