


RETRACTABED[®] SYSTEM



RetractaBed[®] CC Model

- Retracting Bed Frame - Reduces potential falls and increases staff productivity
- Expandable Width - Bed expands to 42 inches wide without the use of tools for more comfort and flexibility
- Soft non-marking rubber bumpers come standard to protect from wall damage
- The bed can be vertically transported for ease of storage
- Each pivot has hardened steel to increase the life of the bed
- Tool-less assembly

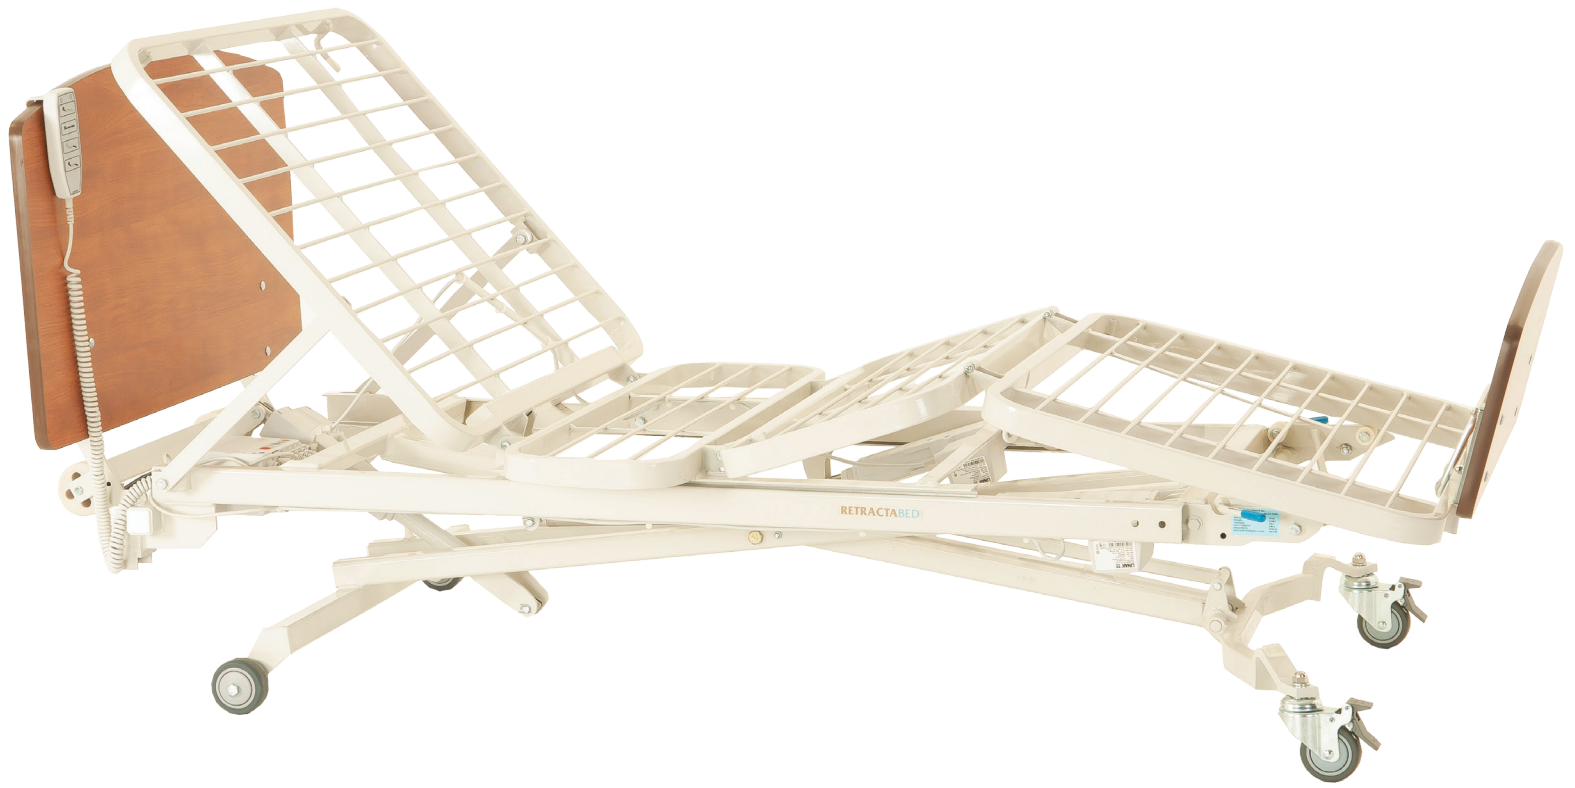

Fall Risk
Non-Retractable Bed

Fall Prevention
RetractaBed[®]

RetractaBed® CC Model Specifications

PHYSICAL SPECIFICATIONS

CC803

- Deck Height Low9"
- Deck Height High..... 25"
- Sleeping Surface 35" w x 80" L
- Length Retracted 71"
- Length Extended..... 85"
- Maximum Safe Working Capacity..... 500 lbs.
- Product Weight..... 215 lbs.
- Maximum Back Angle.....64°
- Maximum Knee Angle.....24°
- Mobility Height.....any height

ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature 41° F to 104° F (5° C to 40° C)
- Operating Relative Humidity20% to 90% @ 86° F / 30° C
- Operating Atmospheric Pressure 700 to 1600 hPa
- Storage Temperature -10° C to -50° C
- Storage Relative Humidity20% to 90% @ 86° F / 30° C
- Storage Atmospheric Pressure..... 700 to 1060 hPa

ELECTRICAL SPECIFICATIONS

- Main Voltage Input120 V AC
- Max Current Input.....2.70 A
- Main Frequency Input..... 60 Hz
- Controller Output Voltage24 V DC




LIMITED WARRANTY

- 15 year limited warranty on bed frame
- 5 years on drive system
- 1 year on wood products and casters
- Lifetime warranty on all welds

Approvals: IEC60601-1:2005 2nd edition, ANSI / AAMI ES60601-1:2005 2nd edition, and CAN / CSA-22.2 No 60601-1:2008

Endboard Options



Standard Board Shapes



ENGLISH OAK



MAHOGANY



CHERRY



LIGHT OAK

*Custom boards are available

ACCESSORIES



4" Bed Extender



Transport Dolly



¼ Length Side Rails



Floor Bumper Guard



42" Bed Width Kit



Pivoting Assist Bars



Trapeze Assembly



Battery Backup